


MAXI-GALA

TECHNICAL DATA SHEET

TILE-IN | MEMBRANE FLANGE | 4-POINT LEVELING



DIMENSIONAL DRAWING

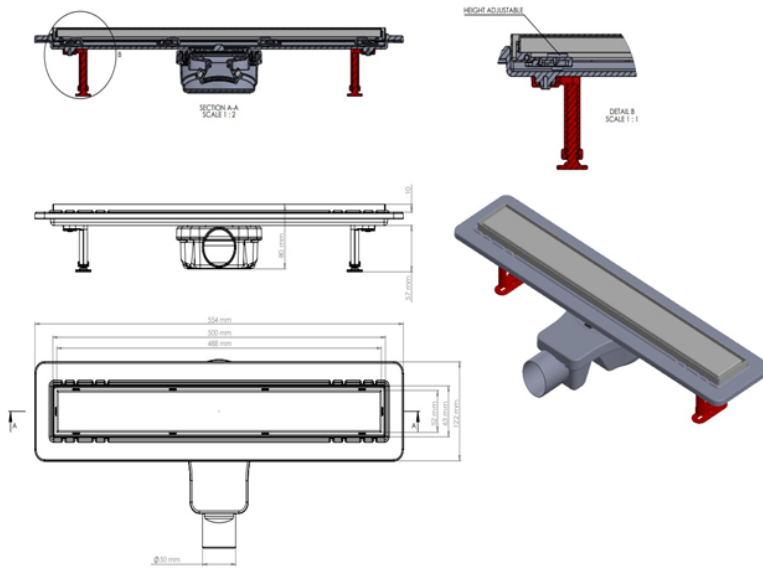

Nominal 50 cm MAXI-GALA shown. Dimensions in millimetres. Drawing not to scale.

AVAILABLE SIZES

NOMINAL	OVERALL L	TILE TRAY
30 cm	354 mm	288 mm
40 cm	454 mm	388 mm
50 cm	554 mm	488 mm
60 cm	654 mm	588 mm
80 cm	854 mm	788 mm

COMMON: Ø50 | W 120 mm | HEIGHT ADJUSTABLE

MATERIALS & CONSTRUCTION

- **FLANGED BODY**
Original high-grade ABS
- **INNER FRAME**
AISI 304 stainless steel - 1.0 mm
- **TILE-IN GRATE**
AISI 304 stainless steel - 1.0 mm
- **LEVELING SYSTEM**
4 internal plastic adjustment screws

FUNCTIONAL PERFORMANCE

- 1 Tile-in architectural finish**
The recessed stainless tray accepts a cut-to-size ceramic tile for a continuous floor appearance.
- 2 Post-screed fine levelling**
Four internal plastic adjustment screws allow precise final alignment after the screed is completed.
- 3 Membrane-ready flange**
The wide ABS flange provides a continuous surface for secure waterproofing-membrane application.
- 4 Dual protection system**
Dual non-return flaps and the S-type water seal help block sewer insects, gases and unpleasant odours.

CARE & MAINTENANCE WARNING

- Do not use hydrochloric acid, drain openers, chlorine bleach, abrasive powders or strongly acidic / alkaline chemicals.
- Use a pH-neutral cleaner with a soft cloth or sponge. Rinse thoroughly with clean water and dry after cleaning.
- Remove cement and grout residues immediately. Periodically clean the grate, inner frame, S-type water seal and dual flaps.